



HOSE REEL SER. 870 / 876

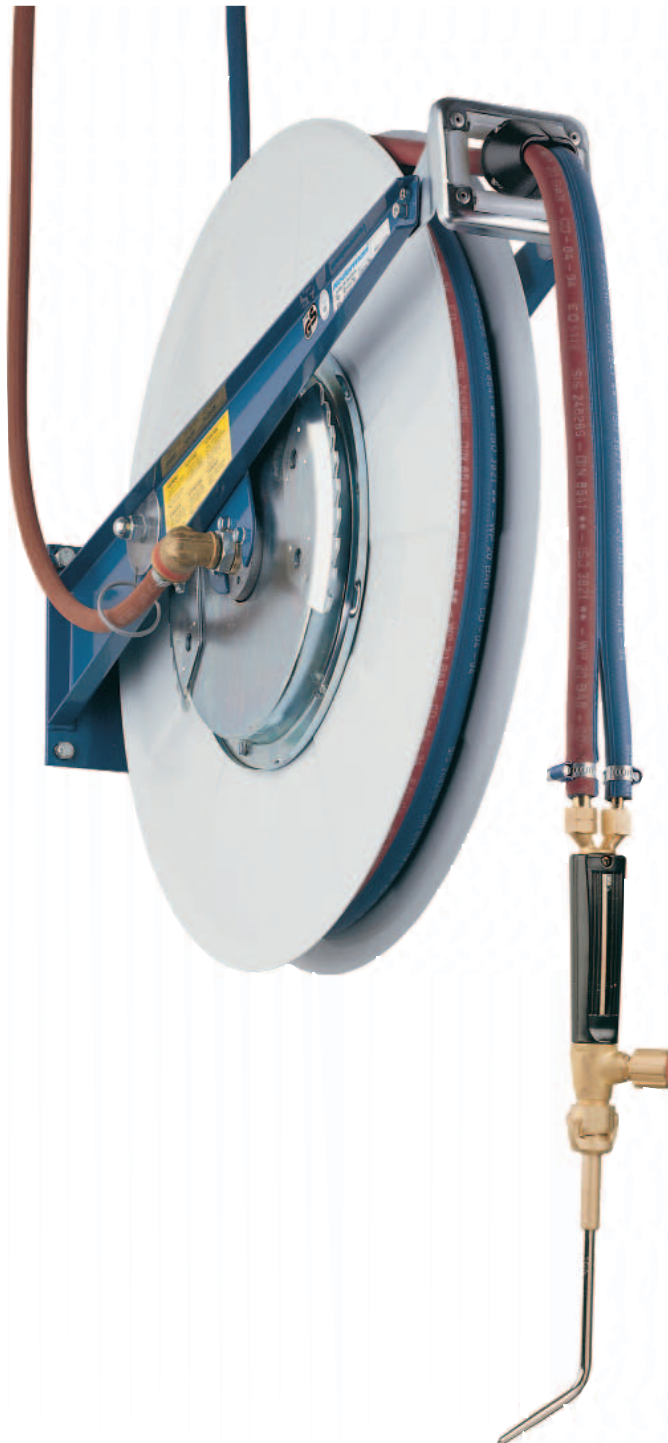

**HOSE REELS FOR OXYGEN / ACETYLENE
MEANS SAFETY AND INCREASED
EFFICIENCY**

Improving your workspace

NEDERMAN HOSE REELS SER. 870 / 876

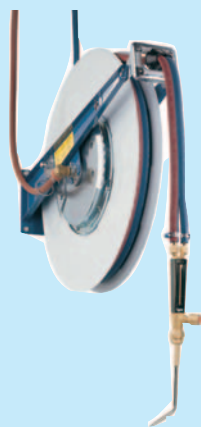

- Single-layer retraction of the hose.
- Open design for safety and easy service.
- All steel construction.

For safety, tidiness and reduced wear and tear.

The handling of hoses cluttering the workshop floor is awkward and a waste of time. Self retracting hose reels let you pull out the required length of hose and store the rest out of harms way. This saves time, makes the job easier and contributes to increased efficiency.

A workshop floor free from loose hose-ends deduces tripping accidents, improves access for carts and trolleys and allows for easier cleaning.

Ser. 870 / 876 from Nederman are of robust construction, they are easily installed, and the well proven design vouches for safe and maintenance free usage. They vary in size allowing for different hose lengths and diameters.


Model range

Medium	Max working pressure	Hose dimensions		Part No. With hose	Part No. Without hose
		Int.diam. mm	(in)	Length m (ft)	
Oxygen / Acetylene	2.0 MPa (290 psi)	2 x 6.3	2 x 1/4"	10 (33)	30827470 30827370
	2.0 MPa (290 psi)	2 x 10	2 x 3/8"	8 (26)	30828670 30828570
	2.0 MPa (290 psi)	6.3 +10	1/4"+3/8"	8 (26)	30827270 30827170
	2.0 MPa (290 psi)	2 x 6.3	2 x 1/4"	18+2* (66)	30828476 30828376
	2.0 MPa (290 psi)	2 x 10	2 x 3/8"	15 (49)	30827476 30827376
Oxygen / LPG	2.0 MPa (290 psi)	6.3+10	1/4"+3/8"	15 (49)	30827276 30827176
	2.0 MPa (290 psi)	2 x 10	2 x 3/8"	15 (49)	30827676 30827676

N.B. All hose connections by tail and hose clamp.


* 20 m hose of which 18 m can be recoiled on the drum.

* Ser. 870
** Ser. 876

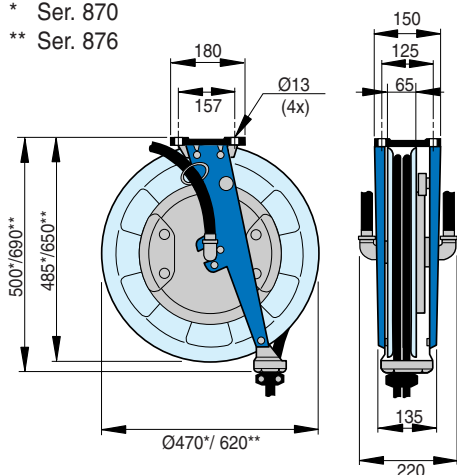

Bracket for wall mounting

For use with reel positioned high on the wall with the hose outlet pointed downwards
Part No. 30321506



Pivoting wall bracket

Hole pattern and dimensions for wall mounting are the same as for the foot plate on the reel
Part No. 30372407
Part No. 30372408 Stainless



Revolving foot

Designed for floor installation
Part No. 30341770

870: Material recycling: 71 - 74 % of the weight.
Netweight: including hose on hose reel 16 kg
876: Material recycling: 70 - 72 % of the weight.
Netweight: including hose on hose reel 26 - 30 kg

Nederman[®]
Improving your workspace

Rights reserved for modification of design and measurements.

Manufacturer:
AB Ph. Nederman & Co
Sydhamnsgatan 2
SE-252 28 Helsingborg, Sweden
www.nederman.com
Tel.: Int. +46 42 18 87 00
Fax: Int. +46 42 14 79 71
E-mail: support@nederman.se
Certificated to ISO 9001 and ISO 14001

The majority of Nederman's products are manufactured within
ISO 9001 and ISO 14001-certified Quality- and Environmental system.
For more detailed information please contact us.