



SA-G Swing Arm

Gives you maximum accessibility

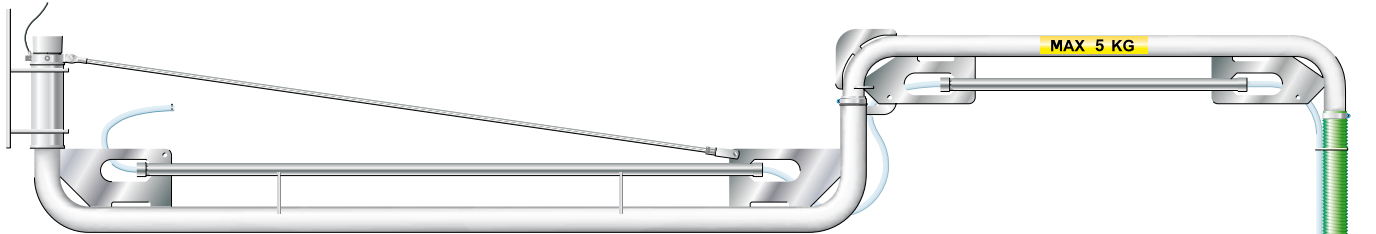

SA-G Swing arms

The SA-G arm is an excellent arm for on-tool extraction of all kinds of sanding, grinding and cutting dust and can be fitted with a balance block to take the weight of a grinding tool.

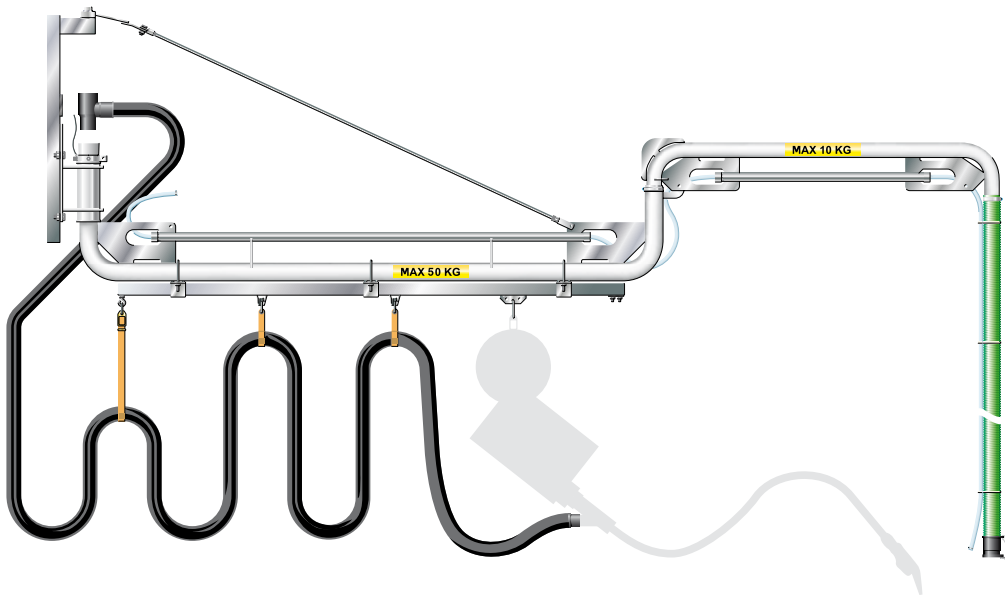

SA-GW Swing arms

The SA-GW arms are based on the same design as the SA-G, but come equipped with a rail and reinforcement in order to support the weight of a wire feed unit, making them ideal for a combined extraction of welding fumes and grinding dust.

Swing arms SA

This arm offers maximum convenience when working with on-tool or on-torch extraction. Also ideal for the combination of grinding and welding applications.

User friendly

The design ensures that the arm smoothly follows the tool, for instance a sander, grinder, cutter or a welding torch. It supplies power to the tool and removes the dust.

These corrosion-resistant arms are equipped with two swivel points and are made of galvanized pipe. An integral compressed air hose comes as standard with the arm, enabling the user to conveniently connect an air-powered tool. Alternatively, the arm can be fitted with a cable for electric tools. For optimum efficiency, the use of an automatic vacuum valve is strongly recommended.

Economic and safe solution

Using extension arms saves floor space as well as money. Hoses are kept off the floor which reduces wear of the vacuum hoses and contributes to better safety in the workshop.

A swing arm offers

- a free and open work space, full freedom of movement and optimal coverage.
- full suction power at hard-to-reach working areas.
- optimal convenience when using on-tool extraction.

- Increased safety
- Easy and stable to operate
- Economical
- Access hard-to-reach working areas

Technical Data SA-G Swing arms

Description	Length		Weight		Max load outer arm	
	m	ft	kg	lb	kg	lb
SA-G 300	3	10	22.5	50	10	22
SA-G 450	4.5	15	28.5	63	8	18
SA-G 600	6.0	20	33	73	5	11

Technical Data SA-GW Swing arms

Description	Length		Weight		Max load inner arm		Max load outer arm	
	m	ft	kg	lb	kg	lb	kg	lb
SA-GW 300	3	10	54	119	50	110	10	22
SA-GW 450	4.5	15	60	132	50	110	10	22
SA-GW 600	6.0	20	65	143	50	110	10	22

Increased safety:

- Hoses and cables are kept off the floor

Easy and stable to operate:

- Adjustable friction, grinder and torch always at hand

Economical:

- Saves floor space
- Reduced wear of vacuum hoses
- Reduced wear of cables
- Integral rail for wire feeder
- Integral compressed air supply, electrical cable as option

Corrosion resistant:

- Fully galvanised

Model	Part no.
SA-G 300 swing arm	40181020
SA-G 450 swing arm	40181030
SA-G 600 swing arm	40181040
SA-GW 300 swing arm	40181050
SA-GW 450 swing arm	40181060
SA-GW 600 swing arm	40181070